





Hexagonal™

Flexshade® BY SHADEFORM

Features: Fire Rated PVC with PVDF Top finish Hot Zinc & Powder Coated Steelwork. Stainless Steel Cables & Fittings. Controlled Water Drainage Links. Minimal Footings for Area Covered. Designed to AS1170 Wind Code and to comply with other Codes worldwide for 160km/hr (45m/sec) wind speed.

HEXAGONAL™ SERIES HEXAGONAL MODULE™ 12, 16, 19

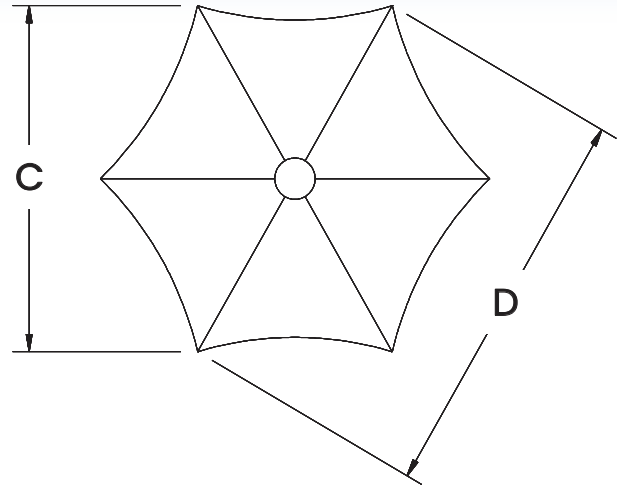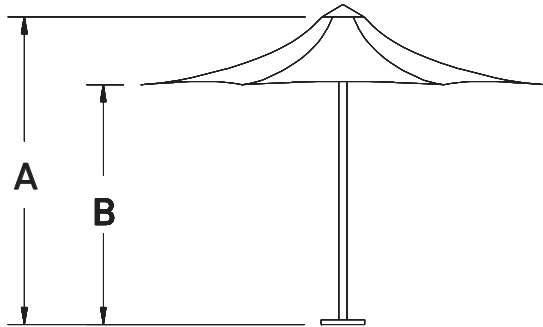

TYPE	*A	*B	*C	*D	SHIPPING	
					DIMENSIONS	WEIGHT
Flexshade *12	2760	2100	3124	3606	3010 x 420 x 475 mm	140 kg
Flexshade *16	3065	2100	4218	4870	3010 x 420 x 475 mm	182 kg
Flexshade *19	3065	2250	5022	5800	3010 x 420 x 475 mm	325 kg



Flexshade® Hexagonal™ can be designed to suit specific customer requirements for height and plan dimension.

CONTACT SHADEFORM FOR A FREE QUOTE

08 8354 2116

enquiries@shadeform.com.au


HEXAGONAL - F*12S, F*16S, F*19S

Wind Rating : 160km/hr (45m/sec)
W45 to AS1170.2
Exposure B to ASCE 7-98


Point Load : 1kN (102kgf) at Corner

Snow Load : 0.95 kPa (96.9kgf per sqm)
Ground Snow Load

Plan Areas : F*12 - 7.8 sq.m (84 sq.ft)
F*16 - 14 sq.m (150 sq.ft)
F*19 - 19 sq.m (205 sq.ft)

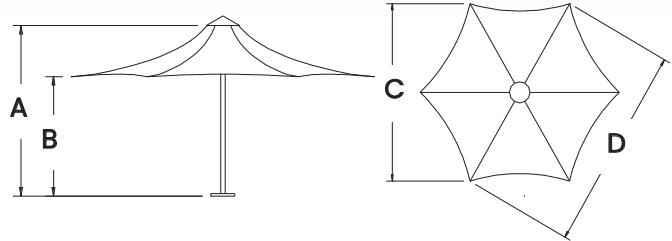

TYPE	A	B	C	D
F*12	2760 mm 9'	2100 mm 6' 10"	3124 mm 10' 3"	3606 mm 11' 10"
F*16	3065 mm 10'	2100 mm 6' 10"	4218 mm 13' 10"	4870 mm 15' 11"
F*19	3505 mm 11' 6"	2250 mm 7' 4"	5022 mm 16' 5"	5800 mm 19'

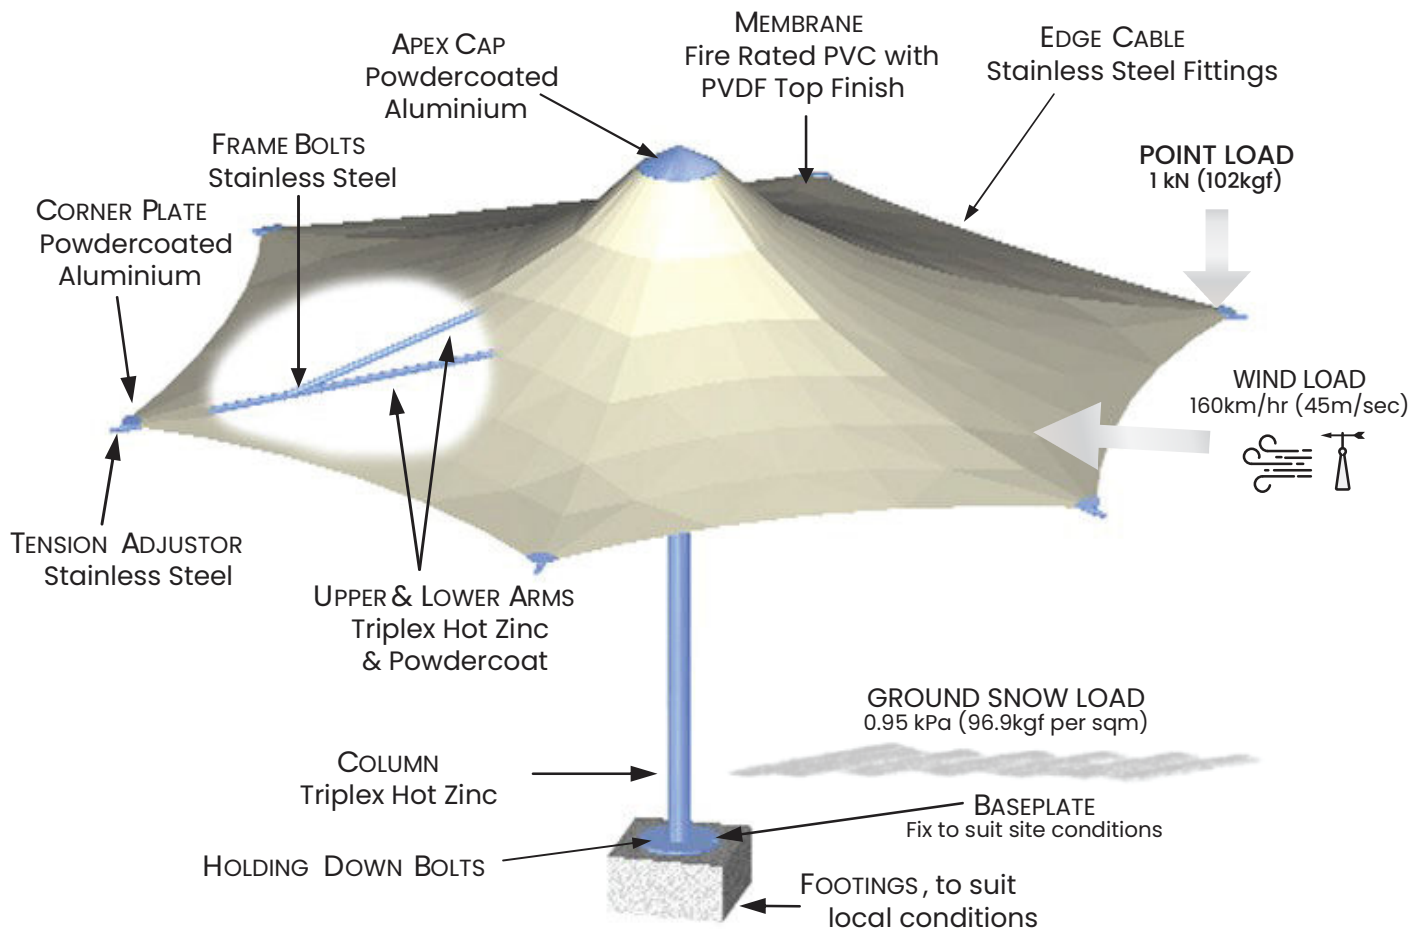

Flexshade[®] can be designed to suit specific customer requirement for height and plan dimension.