





Quartet™

Flexshade® BY SHADEFORM

Features: Fire Rated PVC with PVDF Top Finish. Hot Zinc & Powder Coated Steelwork. Stainless Steel Cables & Fittings. Controlled Water Drainage Links. Minimal Footings for Area Covered. Designed to AS1170 Wind Code and to comply with other Codes worldwide for 160km/hr (45m/sec) wind speed.

QUARTET™ "S" MODEL SQUARE MODULE QUARTET™

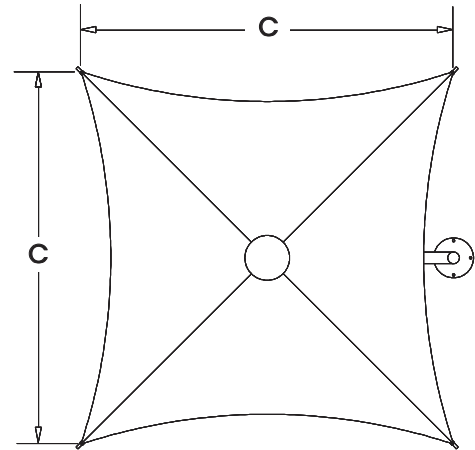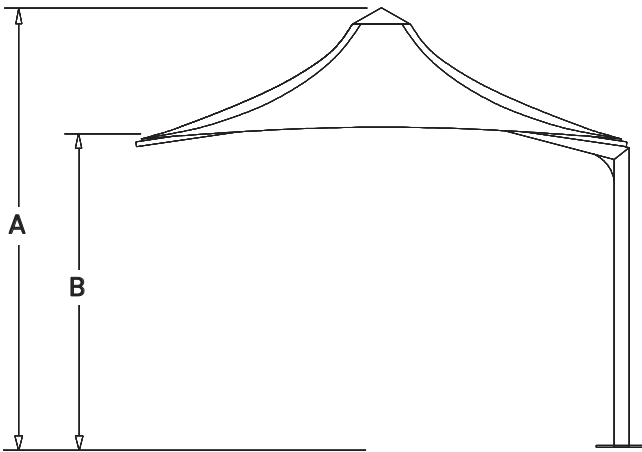

TYPE	*A	*B	*C	SHIPPING	
				DIMENSIONS	WEIGHT
Quartet *8S	3085	2400	2550	3010 x 420 x 475 mm	141 kg
Quartet *10S	3180	2400	3275	3010 x 420 x 475 mm	164 kg
Quartet *14S	3575	2400	4275	3010 x 420 x 475 mm	206 kg
Quartet *5MS	3756	2400	5000	3550 x 420 x 630 mm	303 kg
Quartet *6MS	4045	2400	6000	4125 x 420 x 475 mm	453 kg

Flexshade® Quartet™ can be designed to suit specific customer requirements for height and plan dimension.



Q*8S, Q*10S, Q*14S, Q*5MS, Q*6MS SQUARE


Wind Rating : 160km/hr (45m/sec)
Exposure B to ASCE 7-98

Point Load : 1kN (102kgf) at Corner

Snow Load : 0.95 kPa (96.9kgf per sqm)
Ground Snow Load

Plan Areas :

Q*8S	-	5.3 sq.m (57 sq.ft)
Q*10S	-	8.9 sq.m (96 sq.ft)
Q*14S	-	15.0 sq.m (162 sq.ft)
Q*5MS	-	22.3 sq.m (239 sq.ft)
Q*6MS	-	32.1 sq.m (345 sq.ft)

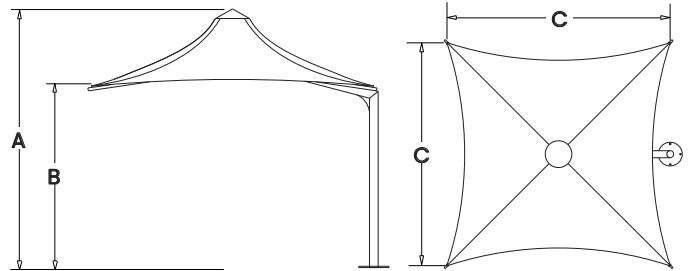

TYPE	A	B	C
Q*8S	3085 mm 10' 1"	2400 mm 7' 10"	2500 mm 8' 2"
Q*10S	3180 mm 10' 5"	2400 mm 7' 10"	3275 mm 10' 9"
Q*14S	3575 mm 11' 8"	2400 mm 7' 10"	4275 mm 14'
Q*5MS	3756 mm 12' 4"	2400 mm 7' 10"	5000 mm 16' 5"
Q*6MS	4054 mm 13' 3"	2400 mm 7' 10"	6000 mm 19' 8"

