





Quartet™

Flexshade® BY SHADEFORM


Features: Fire Rated PVC with PVDF Top Finish. Hot Zinc & Powder Coated Steelwork. Stainless Steel Cables & Fittings. Controlled Water Drainage Links. Minimal Footings for Area Covered. Designed to AS1170 Wind Code and to comply with other Codes worldwide for 160km/hr (45m/sec) wind speed.

QUARTET™ "SP" CANTILEVER SQUARE PIVOT

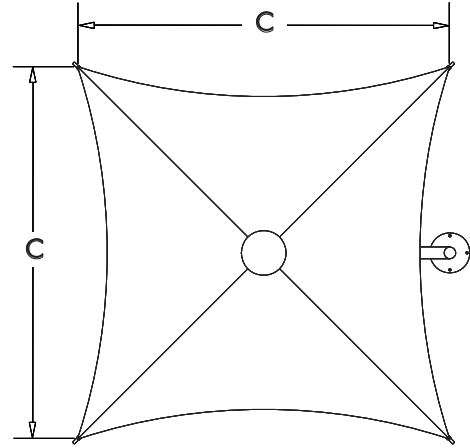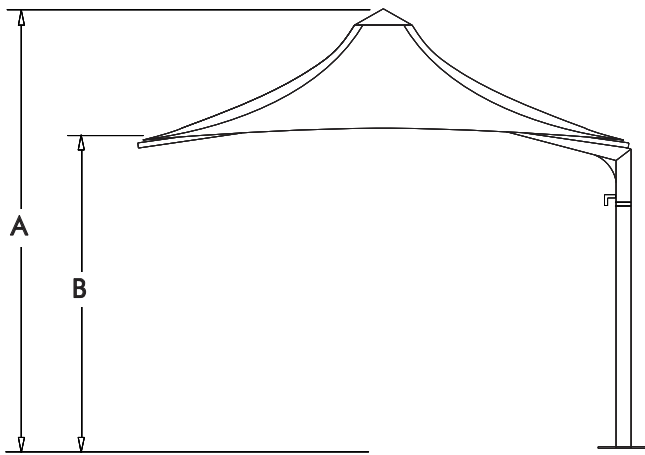

TYPE	*A	*B	*C	SHIPPING	
				DIMENSIONS	WEIGHT
Quartet *8SP	3085	2400	2550	2850 x 420 x 420 mm	141 kg
Quartet *10SP	3270	2400	3275	3100 x 420 x 420 mm	164 kg
Quartet *14SP	3575	2400	4275	3100 x 420 x 420 mm	206 kg
Quartet *5MSP	3825	2450	5000	3100 x 525 x 525 mm	303 kg

MULTIPLY YOUR SHADE BY OVER 250% USING THE PIVOT OPTION

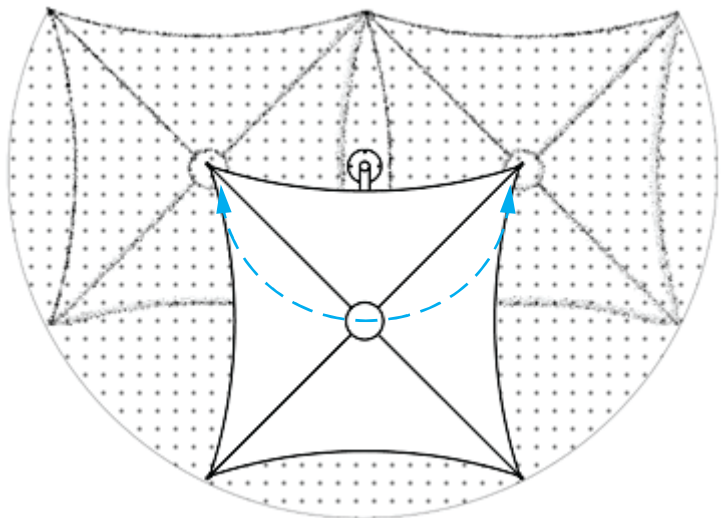


Q*8SP, Q*10SP, Q*14SP, Q*5MSP SQUARE

Wind Rating : 160km/hr (45m/sec)
Exposure B to ASCE 7-98

Point Load : 1kN (102kgf) at Corner

Snow Load : 0.95 kPa (96.9kgf per sqm)
Ground Snow Load

Plan Areas : Q*8SP - 5.3 sq.m (57 sq.ft)
Q*10SP - 8.9 sq.m (96 sq.ft)
Q*14SP - 15.0 sq.m (162 sq.ft)
Q*5MSP - 22.3 sq.m (239 sq.ft)

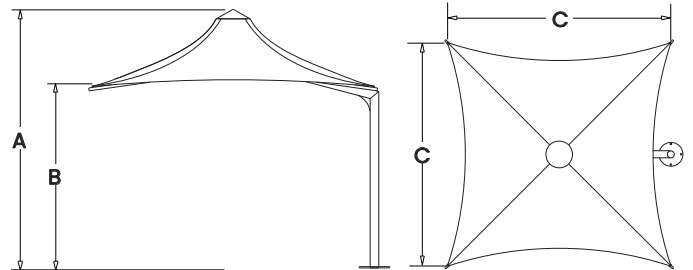

TYPE	A	B	C
Q*8SP	3085 mm 10' 1"	2400 mm 7' 10"	2500 mm 8' 2"
Q*10SP	3180 mm 10' 5"	2400 mm 7' 10"	3275 mm 10' 9"
Q*14SP	3575 mm 11' 8"	2400 mm 7' 10"	4275 mm 14'
Q*5MSP	3756 mm 12' 4"	2400 mm 7' 10"	5000 mm 16' 5"

