





Features: Fire Rated PVC with PVDF Top Finish. Hot Zinc & Powder Coated Steelwork. Stainless Steel Fasteners & Fittings. Controlled Water Drainage Links. Designed to ASCE 7-05 and AS1170 Code and to comply with other Codes worldwide for 160km/hr (45m/sec) wind speed.

TetraMC Twin

Flexshade® BY SHADEFORM

TETRA MC™ SERIES
STRAIGHT EDGE TWIN T*MC

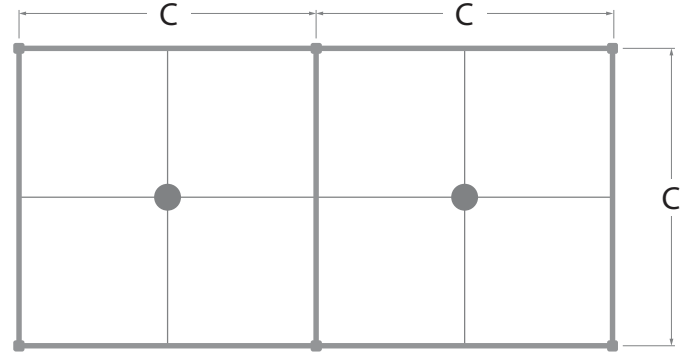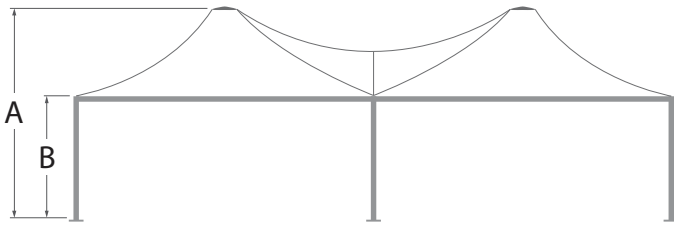

TYPE	*A	*B	*C
T7MC	4880 mm (16 ft)	2500 mm (9 ft 2 in) min	7000 mm (22 ft 11 in)
T6MC	4600 mm (15 ft 1 in)	2500 mm (9 ft 2 in) min	6000 mm (19 ft 8 in)
T5MC	4300 mm (14ft 1 in)	2500 mm (9 ft 2 in) min	5000 mm (16 ft 4 in)
T4MC	4000 mm (13 ft 1 in)	2500 mm (9 ft 2 in) min	4000 mm (13 ft 1 in)



Flexshade Tetra™ can be designed to suit specific customer requirements for height and plan dimensions

TETRA TWIN - T7, T6, T5, T4MC


Wind Rating : 160km/hr (45m/sec)
W45 to AS1170.2
Exposure B to ASCE 7-05

Point Load : 1kN (102kgf) at Corner

Snow Load : 0.95 kPa (96.9kgf per sqm)
Ground Snow Load

Plan Areas :

T7MC - 97.4 sq.m (1048 sq.ft)
T6MC - 71.5 sq.m (769 sq.ft)
T5MC - 49.5 sq.m (532 sq.ft)
T4MC - 31.5 sq.m (339 sq.ft)

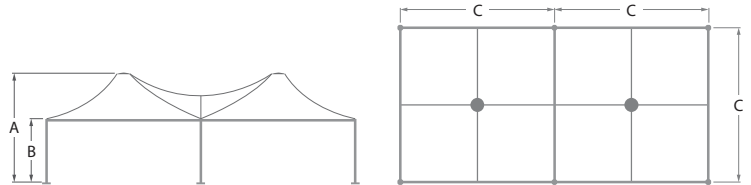

TYPE	A	B	C
T7MC	4880 mm 16'	2500 mm 9' 2"min	7000 mm 22' 11"
T6MC	4600 mm 15' 1"	2500 mm 9' 2"min	6000 mm 19' 8"
T5MC	4300 mm 14' 1"	2500 mm 9' 2"min	5000 mm 16' 4"
T4MC	4000 mm 13' 1"	2500 mm 9' 2"min	4000 mm 13' 1"

