





Tetra™

Flexshade® BY SHADEFORM

Features: Fire Rated PVC with PVDF Top Finish. Hot Zinc & Powder Coated Steelwork. Stainless Steel Cables & Fittings. Controlled Water Drainage Links. Designed to ASCE 7-98 and AS1170 Code and to comply with other Codes worldwide for 160km/hr (45m/sec) wind speed.

TETRA™ SERIES CURVED EDGE T*16, T*25

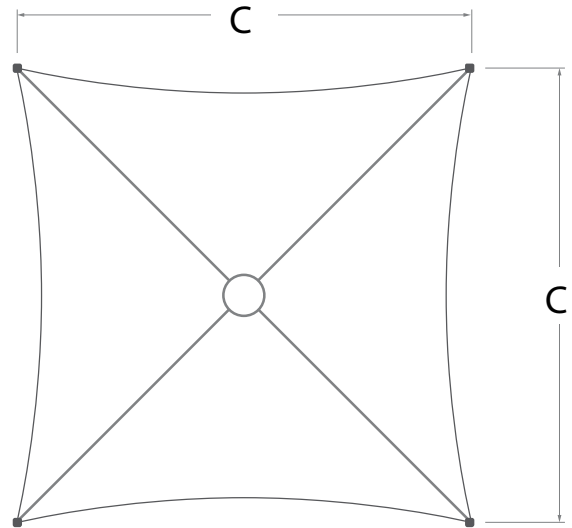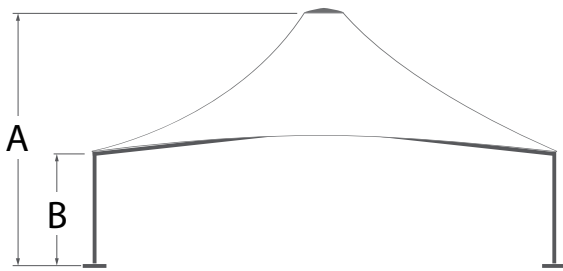

T*25 shown to Scale

TYPE	*A	*B	*C
T*16	3875 mm (12 ft 9 in)	2400 mm (7 ft 10 in)	5000 mm (16 ft 5 in)
T*25	4652 mm (15 ft 3 in)	2500 mm (8 ft 2 in)	8815 mm (28 ft 11 in)



Flexshade® Tetra™ can be designed to suit specific customer requirements for height and plan dimension.


TETRA CURVED EDGE - T*16, T*25

Wind Rating : 160km/hr (45m/sec)
W45 to AS1170.2
Exposure B to ASCE 7-98

Point Load : 1kN (102kgf) at Corner

Snow Load : 0.95 kPa (96.9kgf per sqm)
Ground Snow Load

Plan Areas :
T*16 - 22 sq.m (242 sq.ft)
T*25 - 63 sq.m (677 sq.ft)

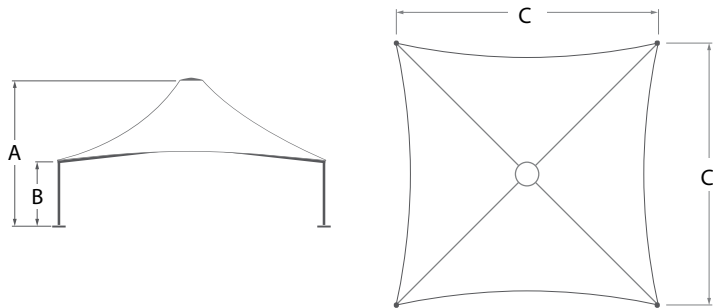

TYPE	A	B	C
T*16	3875 mm 12' 9"	2400 mm 7' 10"	5000 mm 16' 5"
T*25	4652 mm 15' 3"	2500 mm 8' 2"	8815 mm 28' 11"

T*25 shown to Scale

