

SU10 COMMERCIAL CENTRE POLE UMBRELLA



Features at a glance

- Commercial grade aluminium frame structure
- Stainless steel hardware for longevity
- Durable high performance hub and fittings
- Telescopic mast enables umbrella to clear most furniture when closing
- Robust 82.5mm diameter mast with 3.4mm wall thickness
- Protection Cover included
- Tough, commercial grade $50\,x\,25\text{mm}$ strut arm profile

Accessories



Rain Gutter Adjoining square

umbrellas can be connected with removable rain gutters to increase weatherproof area.

Canopy


- Marine solution-dyed fabric
- Waterproof Rating: >300mm water column
- Maintenance: All fabrics can be washed and replaced
- Weight: 315 g/m2
- Colourfastness: 7-8/8
- Shade Rating: UPF 80 UV Protection

RECASENS REN D 1886

Stock Colours



Charcoal Tweed



Special-Order Colours**







Sunflower Yellow

BEST-IN-CLASS WARRANTY








^{**}Other Special Order Colours available on request.

SU10

COMMERCIAL CENTRE POLE UMBRELLA

Size & Configuration



Mounting Options

Surface Plate

For deck, patio and concrete mounting.



Note: Fastenings are not supplied for the Surface Plate.

In-Ground Anchor

For mounting with a concrete footing.




Free-Standing Base + Aluminium Base Cover

For complete customised manoeuvrability.



Optional Castor Wheels shown. Note – Concrete Pavers are required for ballast (not supplied).

Umbrella Dimensions

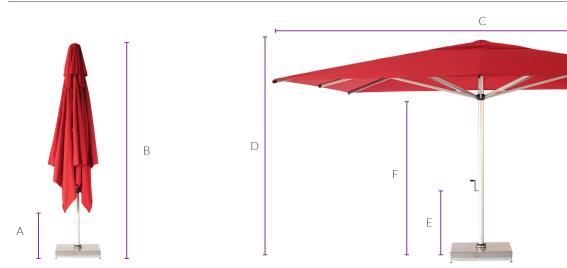

Diag	W-0 100	1 ~~~	
Diag	ram	Lege	nu

Α	Closed Canopy Clearance***
В	Overall Height When Closed***
С	Canopy Width
D	Canopy Width Overall Height***
Ε	Winder Handle Height***
F	Hub Height***
G	Hub Height*** Arms Height***

4.0m Square	5.0m Square
900mm	730mm
3740mm	4280mm
4000mm	5000mm
2870mm	3120mm
840mm	920mm
2110mm	2260mm
2270mm	2470mm

г	Lunn Heißlif	2110111111	220011111				
G	Arms Height***	2270mm	2470mm				
***Free-Standing Base installations will add 177mm to the height and surface plates will add 19mm to the height. Adding Free-Standing Base wheels							



will add a further 45-80mm. All sizings are approximate only and subject to change without notice.