


# FLEXSHADE® Quartet™

- Features:**
- ✘ Fire Rated PVC with PVDF Top Finish.
  - ✘ Hot Zinc & Powder Coated Steelwork. (Alternative Stainless Steel Support Frame)
  - ✘ Stainless Steel Cables & Fittings.
  - ✘ Minimal Footings for Area Covered.
  - ✘ Designed to ASCE7 and AS1170 Code and to comply with other Codes worldwide for 160km/hr (100mph) wind speed.

## Quartet™ "DUET" Model

## Square Module Quartet™

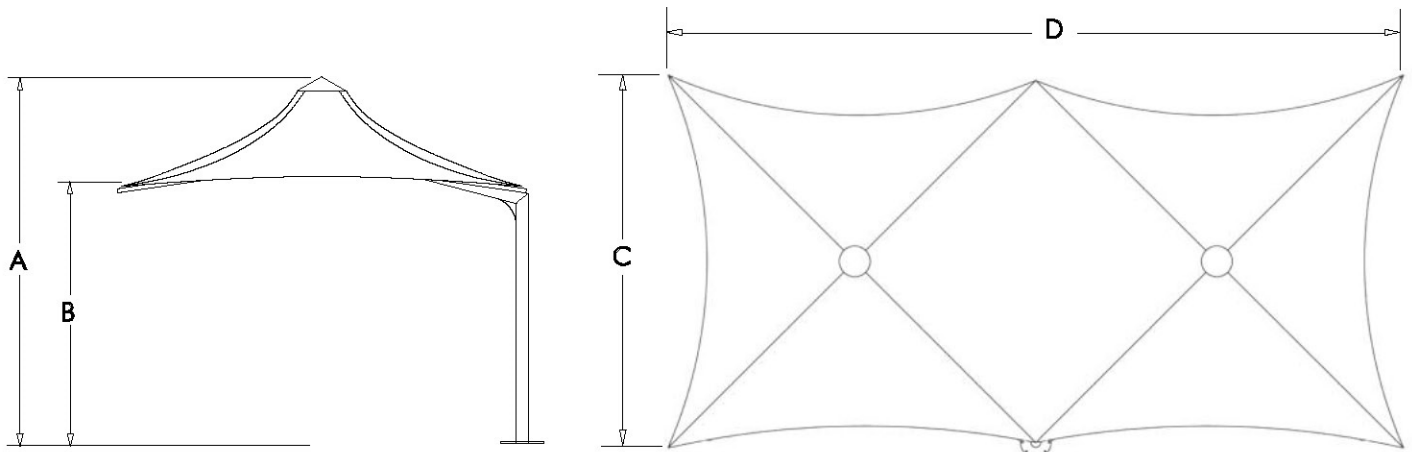

TYPE	*A	*B	*C	*D	SHIPPING	
					DIMENSIONS	WEIGHT
Quartet *8D	3085	2400	2550	5100	3010 x 420 x 475 mm	261 kg
Quartet *10D	3180	2400	3275	6550	3010 x 420 x 475 mm	342 kg
Quartet *14D	3575	2400	4275	8550	2 x 3010 x 420 x 475 mm	479 kg
Quartet *5MD	3756	2400	5000	10000	2 x 3550 x 420 x 475 mm	688 kg

Flexshade® Quartet™ can be designed to suit specific customer requirements for height and plan dimension.



An Activity of TENSION SPAN STRUCTURES PTY LTD ABN 20 050 400 836  
 62 Commercial Road, Fortitude Valley, Queensland, Australia 4006  
 Ph: (07) 3854 1900 Intl Ph: +61 7 3854 1900 Fax: (07) 3252 1252  
 Email: sales@flexshade.com Web: www.flexshade.com



# Technical Specifications Quartet™ Range


**DUET - Q\*8D, Q\*10D, Q\*14D, Q\*5MD**

**Wind Rating** : 45m/sec (100mph)  
Exposure B to ASCE 7


**Point Load** : 1kN (225lbf) at Corner

**Snow Load** : 0.95 KPa (20 psf)  
Ground Snow Load

**Plan Areas** : Q\*8D - 11.2 sq.m (120 sq.ft)  
Q\*10D - 18.9 sq.m (203 sq.ft)  
Q\*14D - 33.0 sq.m (355 sq.ft)  
Q\*5MD - 47.3 sq.m (509 sq.ft)

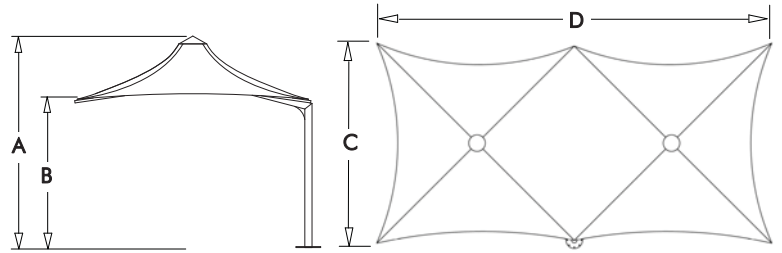

TYPE	A	B	C	D
Q*8D	3085 mm 10' 1"	2400 mm 7' 10"	2500 mm 8' 2"	5000 mm 16' 4"
Q*10D	3180 mm 10' 5"	2400 mm 7' 10"	3275 mm 10' 9"	6550 mm 21' 6"
Q*14D	3575 mm 11' 8"	2400 mm 7' 10"	4275 mm 14'	8550mm 28'
Q*5MD	3756 mm 12' 4"	2400 mm 7' 10"	5000 mm 16' 5"	10000mm 32' 10"

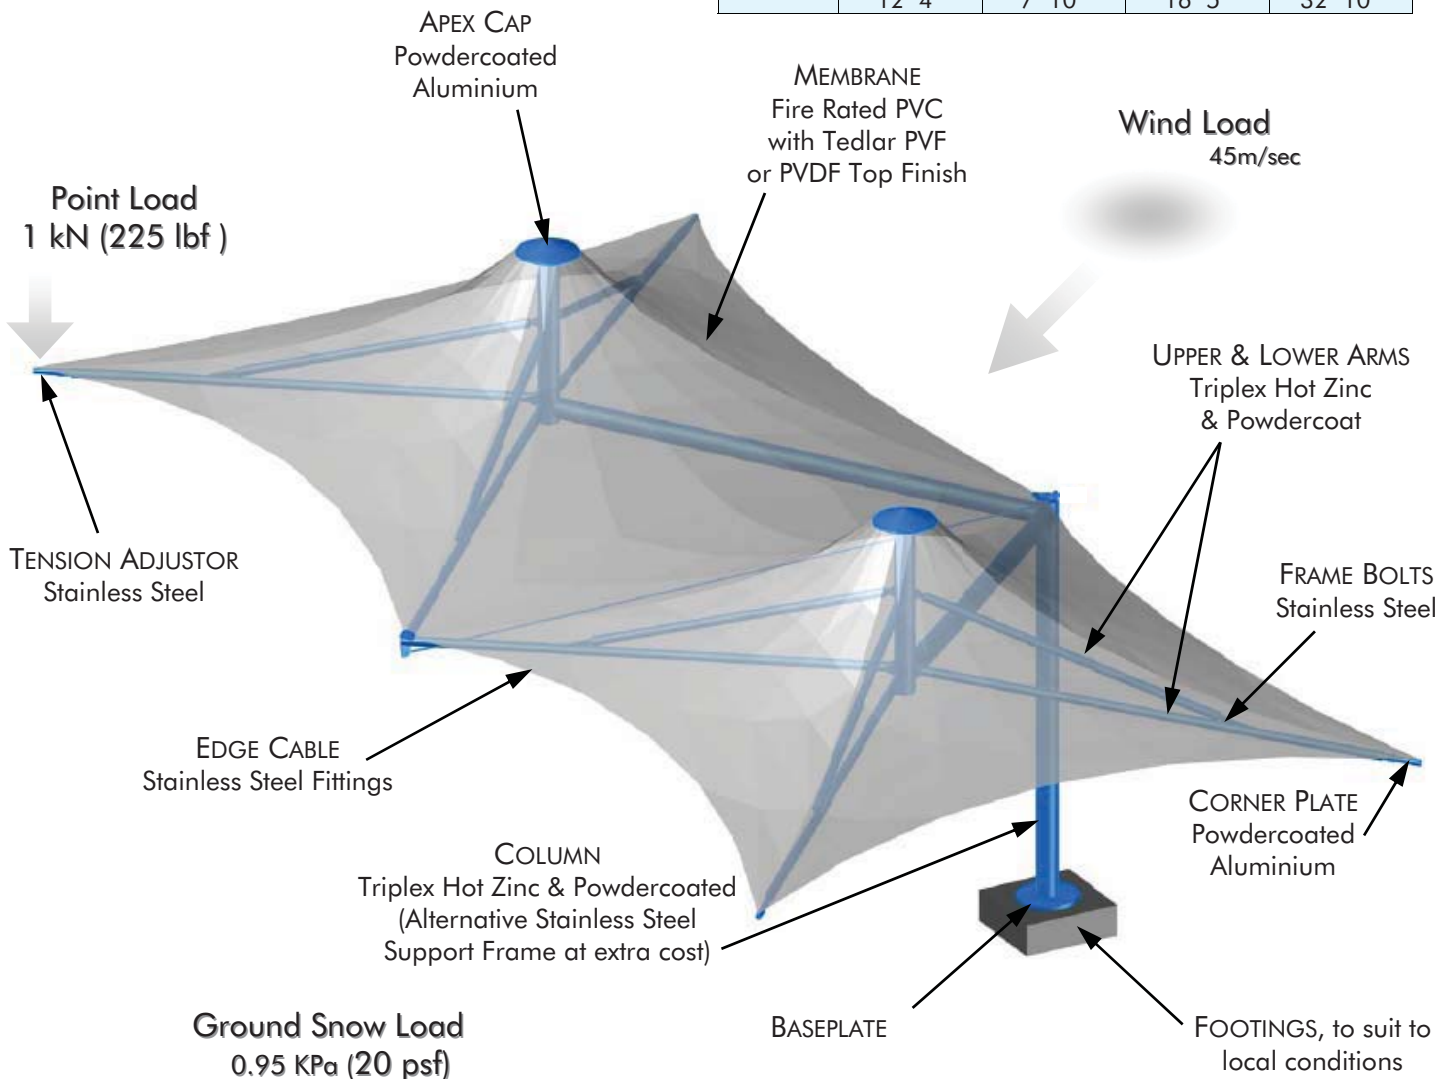

Flexshade® Quartet™ can be designed to suit specific customer requirements for height and plan dimension.